



RFlexIDoor - Specifications


Key Features

- Allows up to 200 cards to be programmed (extensible).
- Up to 9 user configurable time periods. Each allowed card can be assigned one time period (default is "always")*.
- Programming and configuration with just two cards. No pc or special configuration devices required.
- Programming and configuration guided on the built in LCD display. No complicated beep or led flashing code to determine the current configuration state.
- Works just as standalone for application with limited security requirements (build in relay) or as a master/slave configuration for high security requirements. Relay is only active in the indoor master reader, the outdoor slave reader only provides remote reading antenna.
- Ready for REX (Request for Exit) connection.
- Possibility to log the last granted transactions and to dump them to a mifare card (useful in case of efracation)*.




* under development, will be available soon.

Standard Security Standalone

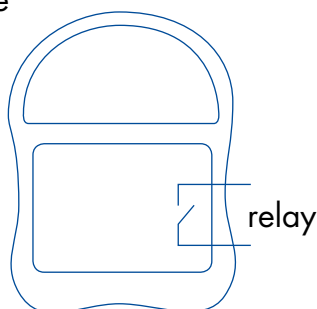

High Security Master / Slave

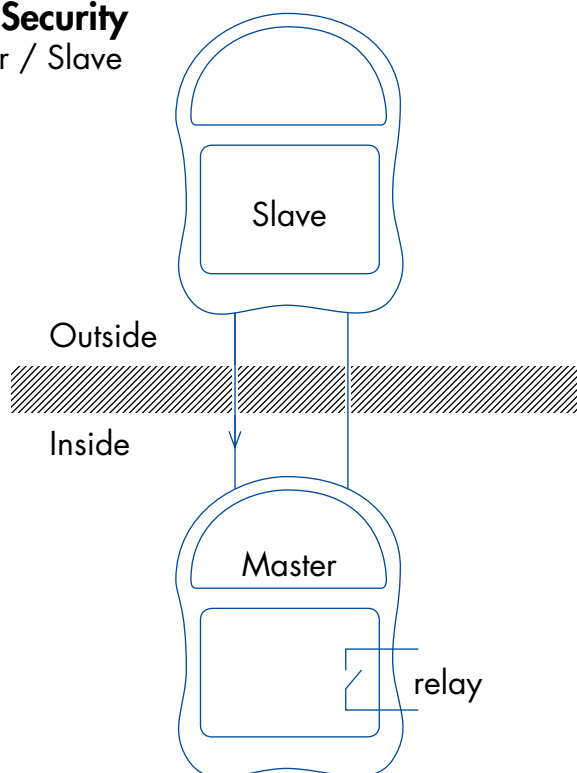

Wiring Connector Pinouts — Pin Description

- | | |
|----|---|
| 5 | Red LED external control |
| 6 | REX input |
| 7 | GND for REX |
| 8 | Relay Normally Open |
| 9 | Relay Common |
| 10 | Relay Normally Closed |
| 11 | Power supply (8 to 35 VDC), max. 400 mA |
| 12 | Ground |